

**DBB**


# DHN-60R20/FS(BW) 500~525W

Full-Screen Single Glass PV Module

## Comprehensive Products & System Certificates

IIEC 61215 / IEC 61730 / CE / INMETRO  
ISO 45001  
2018/International standards for occupational health & safety  
ISO 14001  
2015/Standards for environmental management system  
ISO 9001  
2015/Quality management system

 Material & technology warranty

 Linear power output warranty



No-Busbar(OBB) Technology, shorten 40% of the transmission distance.  
Reduces losses & improving conversion efficiency



Frameless design, installable both vertically & horizontally,  
No water, no dust, snow slide fast, power generation increased by 6-15%



Higher power, longer service life, linear power warranty for 30 years




TOPCon cells, lower attenuation,  
better temperature coefficient & dim light performance




# DHN-60R20/FS(BW) 500~525W

## Design

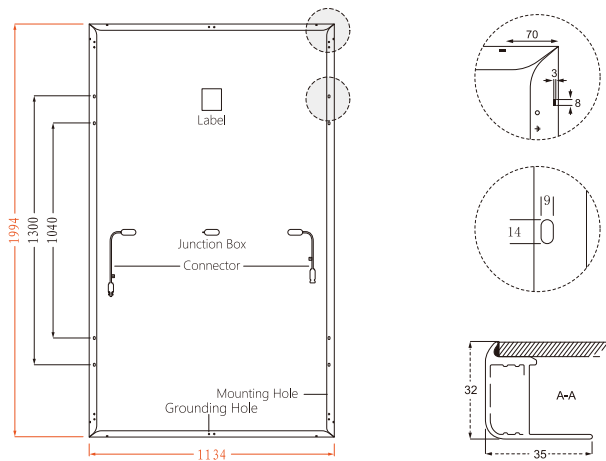

## 30-Year Linear Power Output Warranty

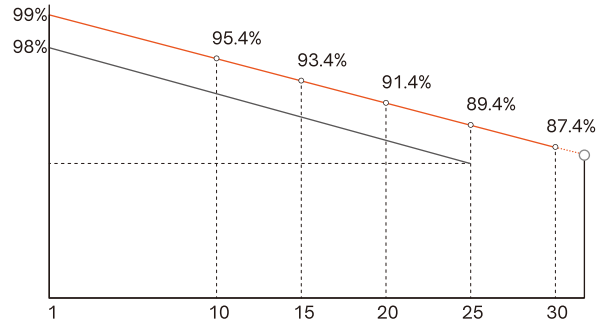

- DAH Solar linear power output guarantee
- Standard linear power output guarantee

## Mechanical Specification

No. of Cells	120 (6×20)
Weight	21.7kg
Cells Type	N-type 182×95.8mm
Dimension (L×W×T)	1994×1134×32mm
Packing	34pcs/Pallet, 748pcs/40HQ

Cable	4.0mm <sup>2</sup> , 300/200mm in length, (Including connector) length can be customized
Glass	3.2mm High Transmission, Antireflection Coating
Junction Box	IP68, 3 Bypass Diodes
Connector	MC4 Compatible

## STC-Electrical Characteristics

Module Type	DHN-60R20/FS(BW)					
	500	505	510	515	520	525
Maximum Power (P <sub>max</sub> /W)	500	505	510	515	520	525
Open-circuit Voltage (V <sub>oc</sub> /V)	43.7	43.9	44.1	44.3	44.5	44.7
Maximum Power Voltage (V <sub>mp</sub> /V)	37.1	37.3	37.5	37.7	37.9	38.1
Short-circuit Current (I <sub>sc</sub> /A)	14.48	14.54	14.60	14.66	14.72	14.78
Maximum Power Current (I <sub>mp</sub> /A)	13.48	13.54	13.60	13.66	13.72	13.78
Module Efficiency (%)	22.11	22.33	22.55	22.78	23.00	23.22

STC-Standard Test Environment: Irradiance 1000W/m<sup>2</sup>, Cell temperature 25°C, Spectrum AM1.5

## NOCT-Electrical Characteristics

Maximum Power (P <sub>max</sub> /W)	376	380	384	387	391	395
Open-circuit Voltage (V <sub>oc</sub> /V)	41.5	41.7	41.9	42.1	42.3	42.5
Maximum Power Voltage (V <sub>mp</sub> /V)	35.2	35.4	35.6	35.8	36.0	36.2
Short-circuit Current (I <sub>sc</sub> /A)	11.69	11.74	11.79	11.84	11.88	11.93
Maximum Power Current (I <sub>mp</sub> /A)	10.67	10.72	10.77	10.81	10.86	10.91

NOCT-Standard Test Environment: Irradiance 800W/m<sup>2</sup>, Ambient temperature 20°C, Spectrum AM1.5, Wind speed 1m/s

## Operating Parameters

Maximum System Voltage	1500V DC
Operating Temperature	-40 ~ +85°C
Maximum Series Fuse Rating	25A
Nominal Operating Cell Temperature	45°C±2°C
Application Level	Class A

## Temperature Coefficient

Temperature Coefficient of I <sub>sc</sub> (αI <sub>sc</sub> )	0.046%/°C
Temperature Coefficient of V <sub>oc</sub> (βV <sub>oc</sub> )	-0.25%/°C
Temperature Coefficient of P <sub>max</sub> (γP <sub>mp</sub> )	-0.29%/°C
Snow load, frontside / Wind load, backside	5400Pa/2400Pa